

### Key Features

- USB X.25 and ISO Transport rugged designed adapter
- Network interfaces for RS232, X.21, RS530, RS422, RS449 and V.35 line speeds up to 2 Mbits/s
- USB 2.0 bus powered, 3.0 and 1.1 compatible
- Handles NRZ, NRZI, Manchester Encoding, Conditioned Diphase, FM0 & FM1 encoding
- 32 and 64 bit drivers for Linux and Windows
- APIs to X.25 and ISO Transport
- 32 and 64 bit drivers for Linux and Windows
- Up to 4095 simultaneous sessions
- Includes IP over X.25 and Support for *openFT/FTAM*
- X.25 Developers Toolkit and Line monitor included



### Overview

The FarSync Flex X.25 adapter is a high quality X.25 solution for business, government and military applications, it has been developed to provide high performance, rugged X.25 connectivity for Linux and Windows systems.

The USB powered adapter will support an X.25 line at speeds of up to 2.048 Mbits/s. The highly flexible universal network connector supports RS232, X.21, RS422, RS530, RS449 and V.35 network interfaces.

A Developers Toolkit is provided with the product including a Line Monitor application.

#### Features under Linux:

The Flex adapter supports Linux kernel 2.6 and 3.0 onwards in 32 and 64 bit formats, including the leading distributions supplied by Redhat, SuSE, Debian, Ubuntu, Fedora, Slackware and more. SMP (multi-processor) and multi-core systems are supported. Configuration is by a Java based GUI or via text files for embedded use.

There are APIs to the X.25 layer, a Sockets based interface and a Java API. There is also an API to the ISO Transport layers (ISO 8073 - connection oriented).

IP over X.25 support is included permitting TCP/IP operation over an X.25 network.

**XOT (X.25 over TCP/IP) support is available as an option**, using the same APIs as X.25. XOT can operate at the same time as X.25.

Up to 254 connections are supported as standard, or up to 4,095 connections using the FarSync X25 High Capacity Pack.

FarSite is committed to supporting the FarSync Flex X25 on new versions of Linux and Linux kernels as they are released. The source code for the driver and the libraries for the API are supplied with the product, allowing rebuilding by the end user for use with almost any of the current or future Linux variants.

#### Features under Windows:

The Flex adapter installs seamlessly as a plug and play device under Windows 8.1, 8, 7, Vista; Windows Server 2012, 2008 and 2003. 32 and 64 bit Windows operating systems are supported.

The X.25 software has a host of features including ISO Transport (classes 0 to 3), support for OpenFT FTAM, a WinSock2 compliant Sockets API, a Java API, and a COM Port API. The Sockets API is also accessible from .NET applications.

Up to 4095 connections can be supported using the FarSync X25 High Capacity Pack or 254 as standard.

IP over X.25 support is included permitting TCP/IP operation over an X.25 network.

## Typical Applications

The FarSync Flex X25 adapter is suitable for connection to all types of **X.25 networks, X.25 over the ISDN D channel, and leased lines**. FarSync X.25 adapters are in use today in a variety of applications, including:

- X.25 networks such as Lottery, Police, Customs, Military, Fishery, Financial, Government and Airline
- E-Commerce gateways for credit adapter verification
- Mixed X.25 and IP networks
- Billing and Mediation
- ATM connections
- Lottery Terminals
- FTAM access
- X.400

The adapter is compatible with all public X.25 networks.

## Line Monitor and Network Statistics Utilities


The line monitor included for Windows and Linux is an invaluable tool. Line traces can be displayed in real time, recorded and reviewed with full protocol decoding.

### Windows version only features:

Recording in pcap format

Wireshark can also be used to trace X.25 line activity in real time.

**A connection status and statistics utility** is also provided. It's functions include the display of the channel connection status and statistics of user data, packet and frame types passed over the X.25 lines.

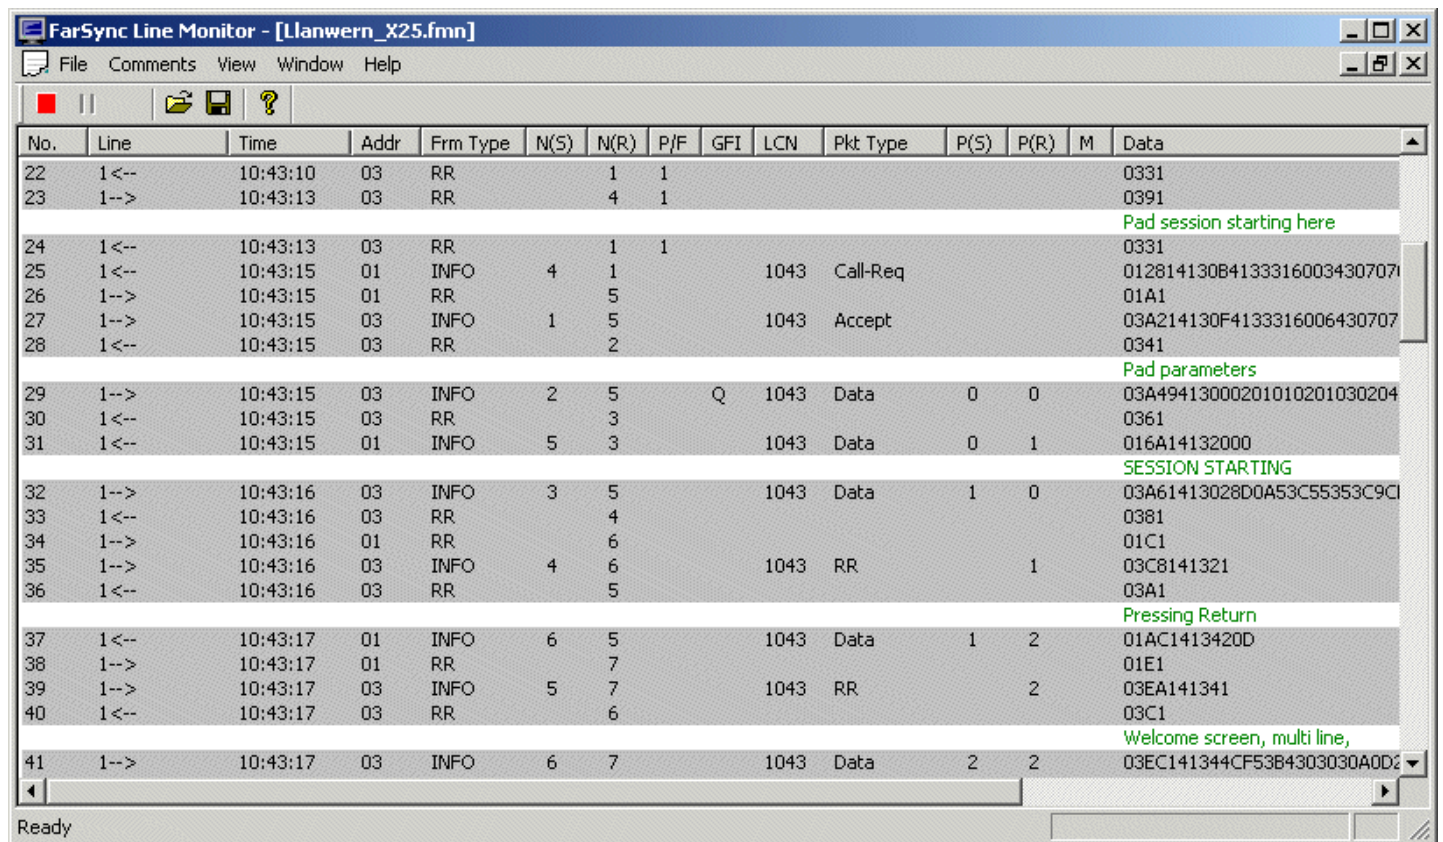

The screenshot shows the 'FarSync Line Monitor - [Llanwern\_X25.fmn]' application window. The window has a menu bar (File, Comments, View, Window, Help) and a toolbar with icons for recording, saving, and help. Below the toolbar is a table with the following columns: No., Line, Time, Addr, Frm Type, N(S), N(R), P/F, GFI, LCN, Pkt Type, P(S), P(R), M, and Data. The table contains 20 rows of data, including protocol types like RR, INFO, and Data, and various hexadecimal and alphanumeric data strings. Some rows have green text annotations like 'Pad session starting here', 'Pad parameters', 'SESSION STARTING', 'Pressing Return', and 'Welcome screen, multi line,'.

No.	Line	Time	Addr	Frm Type	N(S)	N(R)	P/F	GFI	LCN	Pkt Type	P(S)	P(R)	M	Data
22	1<--	10:43:10	03	RR		1	1							0331
23	1-->	10:43:13	03	RR		4	1							0391
														Pad session starting here
24	1<--	10:43:13	03	RR		1	1							0331
25	1<--	10:43:15	01	INFO	4	1			1043	Call-Req				012814130B4133316003430707
26	1-->	10:43:15	01	RR		5								01A1
27	1-->	10:43:15	03	INFO	1	5			1043	Accept				03A214130F4133316006430707
28	1<--	10:43:15	03	RR		2								0341
														Pad parameters
29	1-->	10:43:15	03	INFO	2	5		Q	1043	Data	0	0		03A49413000201010201030204
30	1<--	10:43:15	03	RR		3								0361
31	1<--	10:43:15	01	INFO	5	3			1043	Data	0	1		016A14132000
														SESSION STARTING
32	1-->	10:43:16	03	INFO	3	5			1043	Data	1	0		03A61413028D0A53C55353C9C
33	1<--	10:43:16	03	RR		4								0381
34	1-->	10:43:16	01	RR		6								01C1
35	1-->	10:43:16	03	INFO	4	6			1043	RR		1		03C8141321
36	1<--	10:43:16	03	RR		5								03A1
														Pressing Return
37	1<--	10:43:17	01	INFO	6	5			1043	Data	1	2		01AC1413420D
38	1-->	10:43:17	01	RR		7								01E1
39	1-->	10:43:17	03	INFO	5	7			1043	RR		2		03EA141341
40	1<--	10:43:17	03	RR		6								03C1
														Welcome screen, multi line,
41	1-->	10:43:17	03	INFO	6	7			1043	Data	2	2		03EC141344CF53B4303030A0D?

Screen shot extract from the Windows Line Monitor application

## TCP/IP over X.25

The IP over X.25 support is included as part of the FarSync Flex X25 product and is integrated into Linux and Windows.

**Linux Features:** IP over X.25 support complies with RFC 1356 (IP over X.25). Higher level protocols that run over IP including TCP, UDP, HTTP and FTP are supported.

**Windows Features:** The IP over X.25 support complies with RFC 1356 (IP over X.25), for single and multiple X.25 destinations. Higher level protocols that run over IP including TCP, UDP, HTTP and FTP are supported.

## API and Developers Toolkit

Application developers have a choice of APIs for X.25 and ISO Transport. An API selector guide is provided to assist the developer in choosing the most appropriate interface. The comprehensive Developers Toolkit is included with the product. See the [FarSync X.25 Developers Toolkit and API Datasheet](#) for full details.

## FarSync XOT Extension option

The XOT extension allows applications using the same API to transmit data over XOT (X.25 over TCP/IP). TCP/IP is normally routed over Ethernet on PCs and Servers. The XOT support is compatible with FarSite's [FarLinX X25 Gateway](#) and also other manufacturers' XOT products. The XOT and X.25 interfaces can be used simultaneously.

**For Linux** use the **FarSync XOT Extension for Linux**, it should be ordered at the same time that the FarSync X25 adapter is purchased, although a retrofit is possible.

**For Windows** use the **FarSync XOT Runtime - Windows** product.

## FarSync X.25 High Capacity Pack option

An optional high capacity pack is available for the FarSync Flex X25. The **FarSync X.25 High Capacity Pack** allows up to 4,095 simultaneous connections to be made; a huge increase from the standard 254 on each line. The expanded capacity applies to SVC, PVC and ISO Transport connections.

Customer applications developed to use the standard X.25 Sockets API are compatible with the FarSync X25 High Capacity Pack.

Order the **FarSync X.25 High Capacity Pack - Windows** or **FarSync X.25 High Capacity Pack - Linux**. These products should be ordered at the same time that the FarSync Flex X.25 is purchased although a retrofit upgrade is possible. One FarSync X.25 High Capacity Pack is required per adapter.

## Configuration

For both Windows and Linux, configuration is by a GUI configuration application, rapid installation and easy configuration are key features of the product.

X.25 lines can be reconfigured and restarted without reloading the software.

Many of the parameters such as DTE / DCE selection are determined automatically. Selecting the line speed by default automatically sets suitable timer and retry values. An advanced tab permits users to exactly specify the configuration of the line if necessary.

## Cables

The cable and connector configurations available for the FarSync Flex X25 are described in the **Order Information Table** on the last page of the datasheet.

## Packaging

The X.25 software, firmware, drivers, utilities and the X.25 Developers Toolkit are all included on the CD-ROM supplied with the FarSync adapter. Cables are ordered separately. Flex mounting kit if required is ordered separately.

The CD-ROM supplied with the FarSync Flex X25 includes:

- Drivers for Linux, Windows 8.1, 8, 7, Vista; Windows Server 2012, 2008, 2003
- Numerous example applications with source code
- Documentation for all the APIs in Adobe PDF format
- Source code for Linux drivers and API Libraries
- Network monitor and various useful utility programs

New releases of the software are made available for free download from [www.farsite.com](http://www.farsite.com).

## Software Technical Specifications

<b>Operating System support</b>	Windows 8.1, 8, 7, Vista; Windows Server 2012, 2008, 2003. Linux distributions supplied by Red Hat, SuSE, Slackware, Mandriva, Debian, Ubuntu, Fedora and others with kernel version 2.6 and 3.0 onward.
<b>Linux kernel support</b>	All sub versions of kernel releases from 2.6.12 and 3.0 onward.
<b>32 and 64 bit systems</b>	The FarSync Flex X25 can be used on 32 and 64 bit Linux and Windows systems and supports 32 and 64 bit applications.
<b>X.25 Features</b>	
<b>Data Packets per Second throughput</b>	> 2,000 pps
<b>X.25 CCITT Compliance</b>	1980, 84 & 88
<b>DTE/DCE Operation</b>	Both & Automatic detection and selection
<b>Maximum SVCs (all types)</b>	254, any mix of bothway, incoming & outgoing. 4,095 with the High Capacity Pack (any mix of bothway, incoming & outgoing)
<b>Maximum PVCs</b>	254, 4,095 with the High Capacity Pack
<b>Logical Channel Numbers (LCN)</b>	From 1 to all 4095 LCNs can be specified. Allows incoming calls to be accepted on any channel
<b>Data Packet size range</b>	0 to 4096 bytes
<b>X25 facilities support</b>	Closed User Group (CUG), Network User Identifier (NUI), Fast Select, Packet and Windows size negotiation, Throughput Class Negotiation.
<b>Extended sequence numbering (128)</b>	Yes
<b>IP over X.25</b>	Supported, complies with RFC 1356
<b>Accessible via API</b>	Three APIs, a Sockets based interface, a Java API and a legacy NCB based API
<b>XOT Option Features</b>	
<b>XOT Specification</b>	Complies with RFC 1613 - X.25 over TCP (XOT)
<b>Maximum XOT connections</b>	4,095 on Linux, 4,095 on Windows
<b>Maximum SVCs and PVCs</b>	4,095 on Linux, 4,095 on Windows (any mix of SVCs and PVCs)
<b>Data packets size range</b>	0 to 4,096 bytes
<b>OOB (Out of Band) data</b>	Supported for Interrupts, Resets and the D bit
<b>X.25 facilities support</b>	Closed User Group (CUG), Network User Identifier (NUI), Fast Select, Packet and Windows size negotiation, Throughput Class Negotiation.
<b>Accessible via API</b>	Two APIs, a Sockets based interface and a Java API
<b>ISO 8073 Transport Features</b>	
<b>Standard supported</b>	ISO 8073 (connection oriented)
<b>Classes supported</b>	Classes 0, 1, 2 and 3
<b>Negotiation between classes</b>	Yes
<b>Transport connections</b>	254, 4,095 with the High Capacity Pack
<b>TPDUs in a NSDU</b>	1
<b>Accessible via API</b>	Yes

## Developers Toolkit API Summary

<b>X.25 API - Linux and Windows</b>	The <b>Sockets API</b> is easy to use and provides access to the majority of X.25 features. This is recommended for most developments. Accessible from .NET applications. The <b>Java API</b> , specially developed for Java applications (J2SE, J2EE), is quick and easy to use. Legacy <b>NCB based API</b> providing low level access to all the features of X.25.
<b>ISO Transport API - Linux and Windows</b>	Using a <b>Sockets API on Windows, NCB API on Linux</b> . Provides access to ISO Transport features.
<b>API Manuals</b>	<b>Manuals included, one for each API</b> plus an API selector guide.
<b>Sample programs</b>	A large number of example applications are available for driving all the various APIs. Includes samples using SVC and PVC operation.

## Technical Specifications - Hardware Features

<b>General</b>	Intelligent USB adapter with ARM processor, dedicated RAM and dual bank Flash memory, Field upgradeable onboard firmware, USB Bus powered, USB 2.0 (high-speed - 480Mb/s mode) and 1.1 compatible, Network line connector: HD26 for connection of network cables Hot plug in supported
<b>Physical characteristics</b>	Size: - Height 30mm, Length 126 mm, Width 62mm, Weight: 190g Material: Anodized extruded aluminium 0.6 Metre A to B USB cable with a thumb screw secured B connector.
<b>Network connections and cables supported</b>	X.21 (V.11) - DTE and DCE - DB15M connector, V.35 - DTE and DCE - M34M connector, RS232 (V.24, X.21bis) - DTE and DCE - DB25M connector, RS530 (RS422) - DTE and DCE - DB25M connector, RS449 - DTE DB37M connector. Cables are ordered separately, see the Cables section on the last page for details.
<b>Line Signal Modes</b>	NRZ, NRZI, FM0, FM1, Manchester Encoding, Conditioned Diphase up to 2.048 Mbits/s
<b>Link speed range</b>	RS232: up to 128 Kbits/s X21, V35, RS530, RS449, RS422: 75 baud up to 2.048 Mbits/s
<b>Line Protection</b>	Yes, Littelfuse high speed ESD and over-voltage protection
<b>LEDs</b>	Line status indicator
<b>Approvals and Compliance</b>	EN55022 class B, CE, FCC class B. RoHS2 and REACH Compliant
<b>Operating range °C</b>	From 0 to 55°C ambient air temperature
<b>Power requirements</b>	USB Bus powered, < 100 mA on startup, < 500 mA on full load, < 2 watt
<b>MTBF</b>	MTBF: 276,300 hours - calculation based on Bellcore Method 1 Case 3, 40 deg.C ambient, 15 deg.C case temperature rise above ambient.
<b>Line clocking (internal / external)</b>	Internal and externally generated line clocking is supported, Internal clock range 75 baud to 2.048 Mbits/s on X.21, V.35, RS530, RS422, RS449, Internal clock range 75 baud to 128 Kbits/s on RS232 (V.24), Custom clock rates are dynamically configurable through the API with glitch free transitions.
<b>Mounting Plates</b>	Supplied as a pair, can be fitted without opening the case.
<b>Warranty</b>	Free 5 year warranty.

<b>Ordering Information</b>		
<b>Product Name</b>	<b>Description</b>	<b>Product Code</b>
<b>FarSync Flex X25</b>	1 port synchronous USB Adapter with X.25 Software and X.25 developers toolkit included. Includes the Flex hardware, USB cable, drivers, utility programs, documentation on CD-ROM and a quick start guide.	FS6100
<b>Software Options</b>		
<b>FarSync X.25 High Capacity Pack - Windows</b>	Upgrade to the standard Windows FarSync X.25 software that allows up to 4,095 simultaneous sessions	FS9504
<b>FarSync X.25 High Capacity Pack - Linux</b>	Upgrade to the standard Linux FarSync X.25 software that allows up to 4,095 simultaneous sessions	FS9505
<b>FarSync XOT Extension for Linux</b>	Upgrade to add XOT (X.25 over TCP/IP) to FarSync X.25 adapters on Linux. A FarSync Flex X25 adapter must be purchased.	FS9508
<b>FarSync XOT Runtime - Windows</b>	XOT (X.25 over TCP/IP) Runtime support on Windows	FS9511
<b>Cables</b>		
<b>Product Name</b>	<b>Description of cable types available</b>	<b>Product Code</b>
<b>KCR1</b>	<b>RS232 (V.24, X.21bis) and RS530 (EIA530, RS422) DTE cable</b> , same cable for both, DB25M connector, 1.5 metres.	FS6061
<b>KCR1-DCE</b>	<b>RS232 (V.24, X.21bis) and RS530 (EIA530, RS422) DCE cable</b> . Same cable for both interfaces, DB25F connector, 2 metres.	FS6070
<b>UCX1</b>	<b>X.21 (V.11) DTE cable</b> - DB15M connector, 1.5 metres.	FS6062
<b>UCX1-DCE</b>	<b>X.21 (V.11) DCE cable</b> - DB15F connector, 2 metres.	FS6075
<b>UCV1</b>	<b>V.35 DTE cable</b> - M34M connector, 1.5 metres.	FS6063
<b>UX35C</b>	<b>V.35 special DCE cable</b> - M34F connector, 1.5 metres.	FS6095
<b>KC449</b>	<b>RS449 (RS422) DTE cable</b> - DB37M connector, 1.5 metres.	FS6019
<b>Accessories</b>		
<b>Mounting Brackets</b>	A pair of FarSync Flex mounting brackets, can be fitted without opening case.	FS4901

FarSync ® is a registered trademark of FarSite Communications Ltd.

Microsoft, Windows, and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.

All trademarks and registered trademarks are acknowledged.

Changes are periodically made to the information herein; these changes will be incorporated into new editions of the publication. FarSite Communications may make improvements and/or changes in the products and/or programs described in this publication at any time.