


## MCR2 R01 - Dual RS232C Cable - Product Code XP8922

For use with FarSync T-Series and X.PORT products

The twisted pairs within the cable to be utilised as follows. The pairings are as viewed on the 37 pin connector:

14-22, 15-23, 19-25, 24-29, 33-34, 17-27, 18-28, 30-32, 35-36.

### Physical Layout

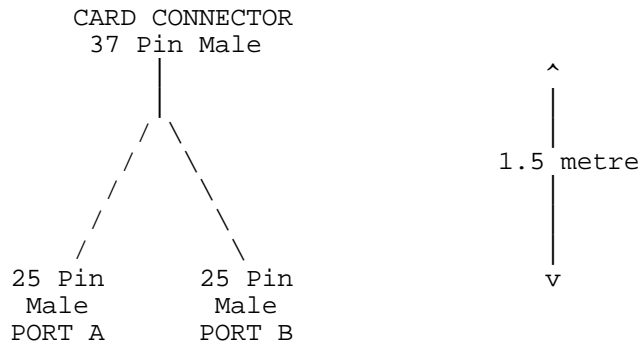

### Dual RS232C Cable:- Pin Connections for Ports

CARD CONNECTOR	PORT A	PORT B	
37 pin male	25 pin male	25 pin male	
1	1	1	Shield
13			
14	2		TxD A
15	4		RTS A
17		2	TxD B
18		4	RTS B
19	20		DTR A
22	3		RxD A
23	5		CTS A
24	17		RxCiA
25	8		DCD A
27		3	RxD B
28		5	CTS B
29	15		TxCiA
30		15	TxCiB
31			
32		17	RxCiB
33	6		DSR A
34	22		RI A
35		8	DCD B
36		20	DTR B
37	7	7	signal ground